


SPECIFICATIONS: NOTE ①

LOAD Z	LOW PASS	CROSS OVER	HIGH PASS	ATTENUATION
8	1 KHZ	1.6 KHZ	4.6 KHZ	4.5 KHZ
	MF -7	HF -15		VAR
8		7 KHZ	12 KHZ	12 KHZ
		HF -12.5	UHF -9	VAR
		UHF -12.5		

CIRCUIT:

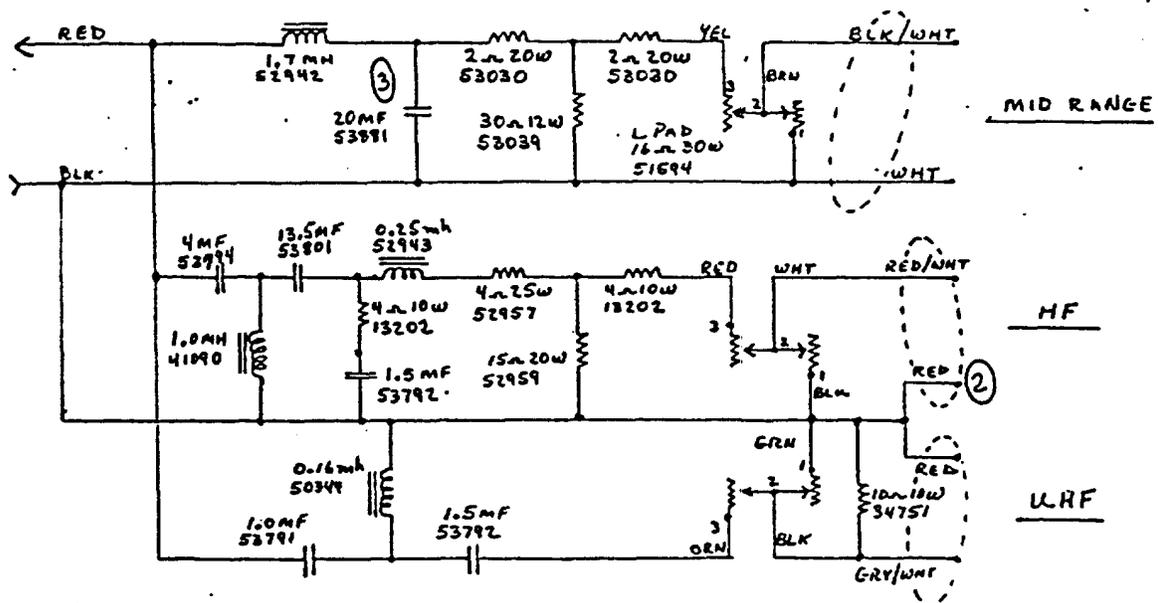

NOTES:

- ① USE STANDARD TEST FIXTURE
- ② WAS BLACK ON EARLY UNITS
- ③ 20MF 53881 WAS (2) 10MF 53791